

FINISHING MACHINES

K-FABRIC

FINISHING MACHINES

K-FABRIC





FINISHING MACHINES

K-FABRIC

Revolutionary laminating machine able to heat melt adhesive fabric on seamless tubular products made of natural or synthetic fibers. Operating frames are electronically adjustable to the proper size and an automatic feeding device prepares the adhesive fabric to be applied on the garment.


Melting is operated in multiple steps, rotating the garment between a hot press, to complete a 360° coupling of the fabrics. At the end of the laminating cycle a slitting device cut the tubular garment to hand the operator a finished open width fabric.

FINISHING MACHINES

K-FABRIC

Specification	Value
Air pressure	6 bar
Air consumption	70 NI/min
Installed power	6 Kw
Avg. Production	60-80 pcs./hr

Features
PLC for the electronic control of all main functions
Electronic self-diagnosis with visualized errors or malfunctions
Touch-screen display for the machine setting with the possibility to store different processing programs

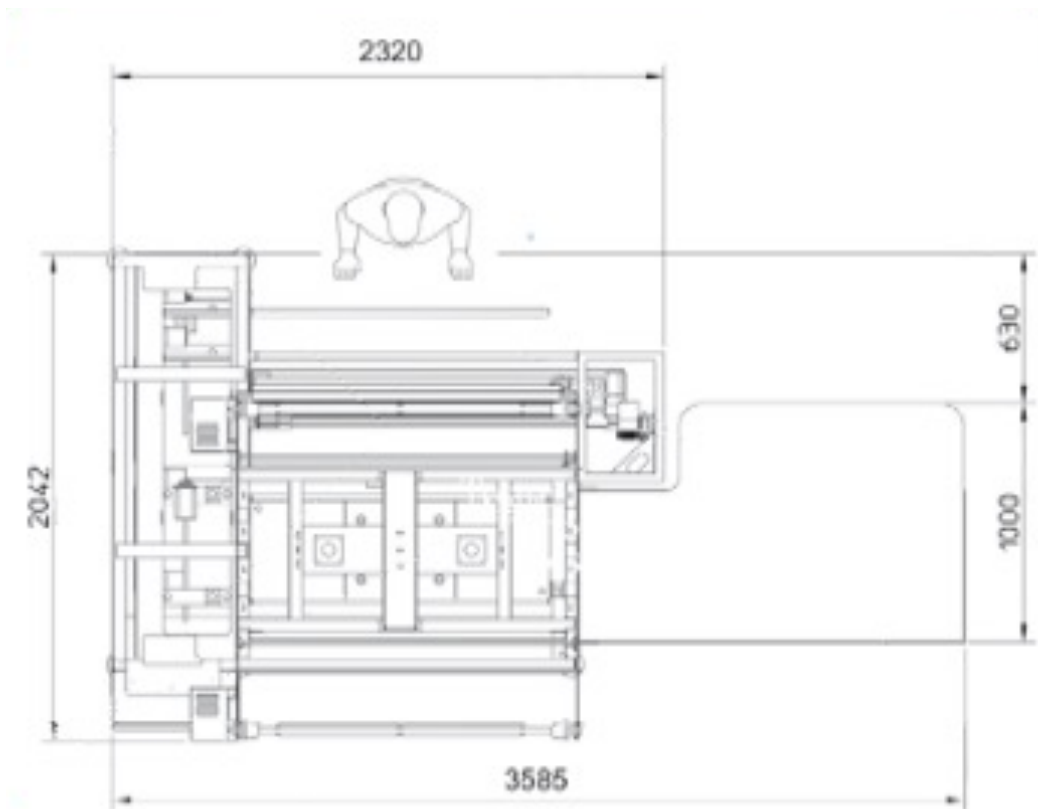

AVVERTENZA:

I dati indicati sono solo a titolo informativo. Santoni S.p.A. si riserva di modificare una o più caratteristiche delle macchine senza preavviso o senza l'obbligo di fornire tali modifiche alle macchine già installate. Le immagini sono solo esemplificative e non costituiscono riferimento.



SANTONI SPA

Via Carlo Fenzi, 14 - 25135 Brescia - Italy
Tel. +39 030 37671 Fax +39 030 3767400

P.IVA e CF: IT 00273280172

info.santoni@santoni.com - www.santoni.com